

# WHS-X-GLUE


## Overview

A multi purpose adhesive used for both permanent and release bonding of floor coverings. L72 Multitack provides an extremely strong bond when used as a wet stick whilst also offering excellent dry tack properties.

WHS-X-GLUE is used to adhere the Total-16 boards to the subfloor when you intend to have a tile floor finish. To be used when looking to minimise floor height.

### FLOOR CONSTRUCTION

- 1 Ceramic tiles/stone  
(for residential areas)
- 2 Warmup adhesive  
(WHS-X-SEAL25)\*
- 3 Warmup primer  
(WHS-X-PRIMER)\*
- 4 Warmup PEX-A 12mm pipe
- 5 Warmup Total-16 includes:
  - Pre-installed aluminium diffusion plates
  - Insulation (0.034 W/m K @10°C)
- 6 Warmup Glue
- 7 Subfloor

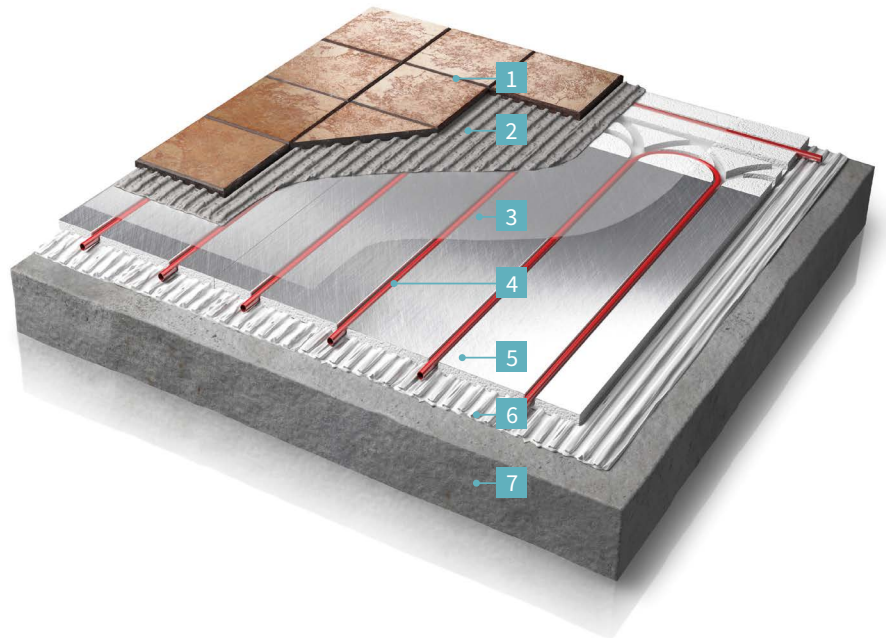

**Hydronic**  
Heating System

0345 345 2288

uk@warmup.com  
www.warmup.co.uk

**Warmup**

The world's best-selling floor heating brand™

# Features

- Versatile
- Wet stick / dry stick
- Pressure sensitive
- Multi-functional

# Technical Specifications

WHS-X-GLUE - TECHNICAL SPECIFICATIONS	
Composition:	Water based
Specific gravity (approx):	1.0
Min. application temperature:	5 °c
Max. application temperature:	40 °c
Coverage (Roller):	150 m <sup>2</sup> (approx)
Coverage (Trowel):	75 m <sup>2</sup> (approx)
Recommended humidity of subfloor:	< 75% RH
Storage between 5 °c and 40 °c (unopened):	12 months

