


Pipe conduit

WHS-CL-CONDUIT

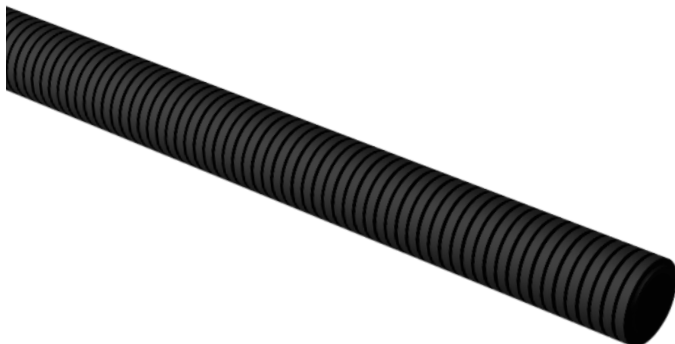

Overview

The corrugated split conduit is used within heated screed floors to insulate service pipes running between the heated rooms and the manifold.



The conduit is split so that it can be easily installed over the pipework without needing to be threaded along it.

has context menu

Technical specifications

Product code	WHS-CL-CONDUIT
Application; OD Ø / ID Ø	20mm / 16mm
Thickness	0.27mm
Length	50m
Working temp	-40°C to +135°C
Flame retardant	Yes
Material	Polypropylene
Colour	Black

Dimensions

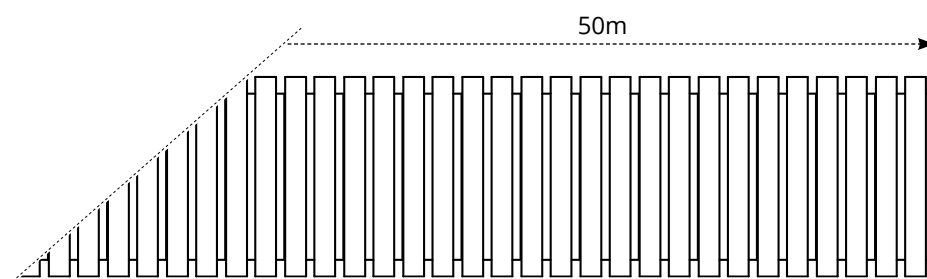

Contact

Warmup plc

www.warmup.co.uk T: 0345 345 2288
uk@warmup.com F: 0345 345 2299

Warmup plc ■ 704 Tudor Estate ■ Abbey Road ■ London ■ NW10 7UW ■ UK

Warmup GmbH ■ Ottostraße 3 ■ 27793 Wildeshausen ■ DE

Warmup - TS - Pipe Conduit - V1.0 - 2023-05-09_EN

Warmup