

Grundfos UPM3 Auto Pump



High-efficiency pump

A-rated energy efficiency label. It uses an advanced motor design and built-in intelligence to adjust its performance to the actual system demand, reducing energy consumption and costs.

Quiet operation

The pump has a low-noise motor and a rubber mounting bracket that reduces vibration and noise, making it ideal for use in residential buildings.

Easy to install

Compact, lightweight, and easy to install, with a plug-and-pump design that requires no external control unit or wiring. It has a user-friendly interface that allows for easy configuration and monitoring of performance.

Reliable design

Designed and manufactured to the highest quality standards, with a long lifespan and minimal maintenance requirements.

Overview

The Grundfos UPM3 Auto 25-70 130 ZZZ pump is a circulator pump that is designed to provide efficient and reliable performance to your underfloor heating system when used with Warmup's S3 Mixing unit. This pump is known for its energy efficiency, ease of installation, quiet operation, versatility, and reliability.

It uses advanced motor technology and built-in intelligence to adjust its performance to the actual system demand, reducing energy consumption and costs.

It is compact and lightweight, with a user-friendly interface that allows for easy configuration and monitoring of performance.

The pump has a low-noise motor and a rubber mounting bracket that reduces vibration and noise, making it ideal for use in residential buildings where quiet operation is important.

Technical specifications

UPM3 AUTO 25-70 130 ZZZ

Electrical data

Power input - P1	5 .. 52 W
Rated voltage	1 x 230 V; 50Hz
Maximum current consumption	0.07 .. 0.52 A
Enclosure class (IEC 34-5)	IP44
Thermal protec	ELEC

Liquid

Pumped liquid	Water
Liquid temperature range	2 .. 110 °C
Selected liquid temperature	60 °C
Density	983.2 kg/m ³

Installation



Maximum ambient temperature	70 °C
Maximum operating pressure	10 bar
Port-to-port length	130 mm

Technical

Maximum head	70 dm
TF class	110

Approvals	CE, UKCA, VDE
-----------	---------------

Dimensions

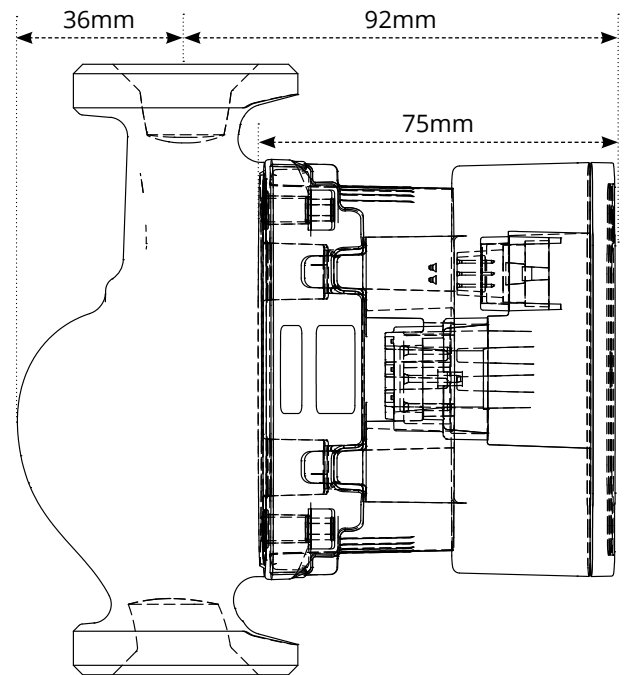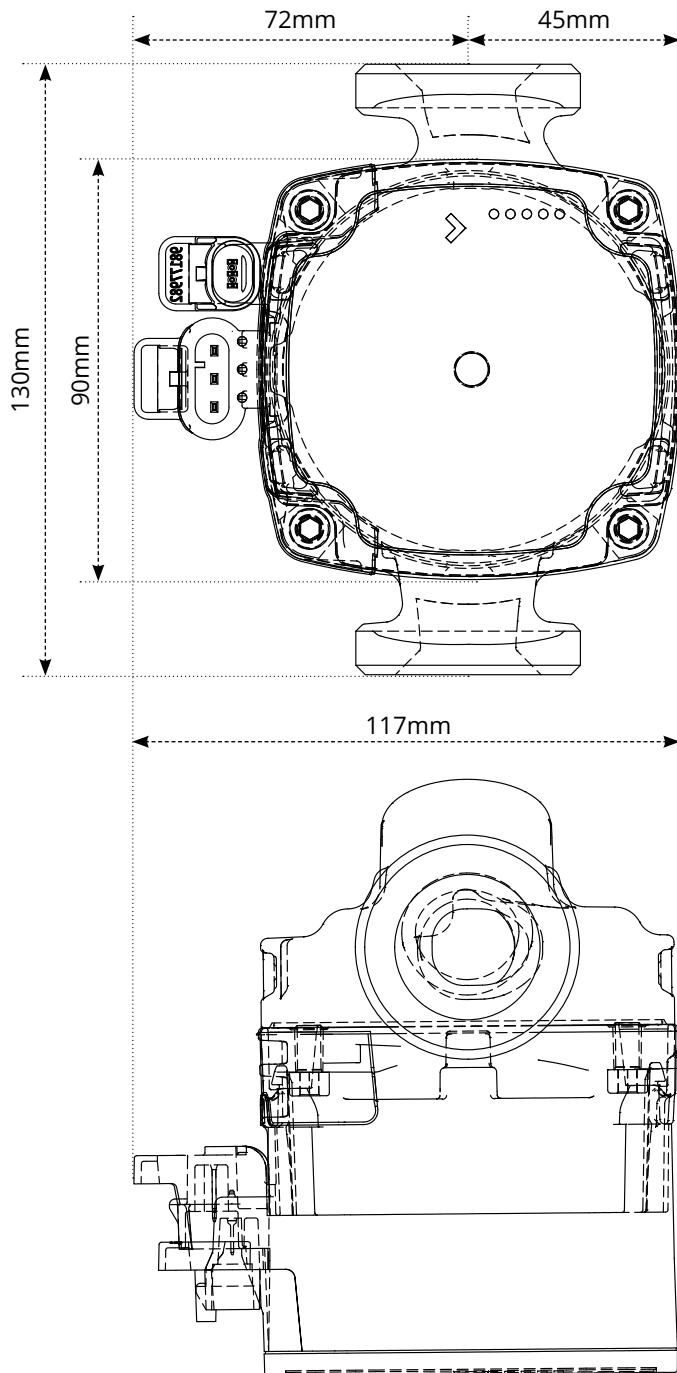

Contact

Warmup plc

www.warmup.co.uk T: 0345 345 2288
uk@warmup.com F: 0345 345 2299

Warmup plc ■ 704 Tudor Estate ■ Abbey Road ■ London ■ NW10 7UW ■ UK

Warmup GmbH ■ Ottostraße 3 ■ 27793 Wildeshausen ■ DE